



**IMPORTANT:**  
Go to [www.extron.com](http://www.extron.com) for the complete user guide, installation instructions, and specifications.


## MLM-WB+ MediaLink® Wall Box Mounting Option ADA Compliance Information

The following Americans with Disabilities Act (ADA) requirements pertain to the installation of the MLM-WB+ into a masonry or non-masonry wall. ADA compliance is a legal requirement in most of the U.S., and is intended to ensure safety for the disabled while they are moving about public places. For specific requirements in your area, contact an ADA specialist.

**NOTE:** For specific and location-based requirements, contact the ADA (1-800-514-0301 or [www.ada.gov](http://www.ada.gov)) or an ADA specialist.

### MLM-WB+ as a Protruding Object Along a Wall


The MLM-WB+ must be mounted with the bottom edge at a maximum of 27 inches (68.6 cm) above the finished floor. This regulation was created to ensure that the blind or visually impaired, using a cane or guide animal, will be able to detect the MLM-WB+ without collision.

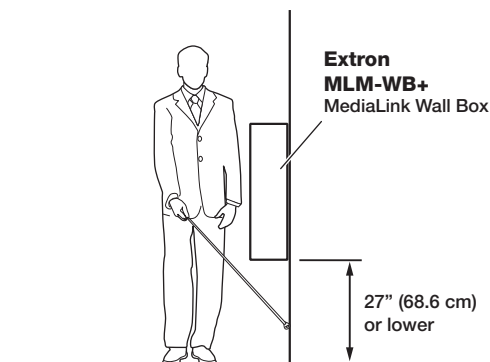

**Figure 1. Minimum Mounting Height for MLM-WB+**

### Wheelchair Access to the MLM-WB+

The topmost controls of devices housed in the MLM-WB+ must be 48 inches (122 cm) or below from the finished floor. This regulation was proposed so that a person in a wheelchair has access to the controls with a maximum side reach of 48 inches (122 cm).

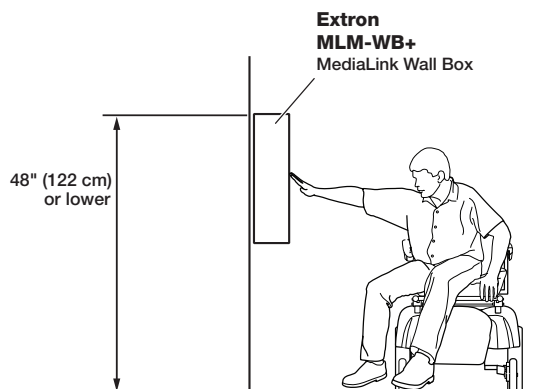

**Figure 2. Maximum Height for Device Controls**

## Recommended Installation

The following illustration shows the recommended placement of the MLM-WB+. It complies with the safety and accessibility ADA requirements for most locations.

**NOTE:** For specific and location-based requirements, contact the ADA (1-800-514-0301 or [www.ada.gov](http://www.ada.gov)) or an ADA specialist.

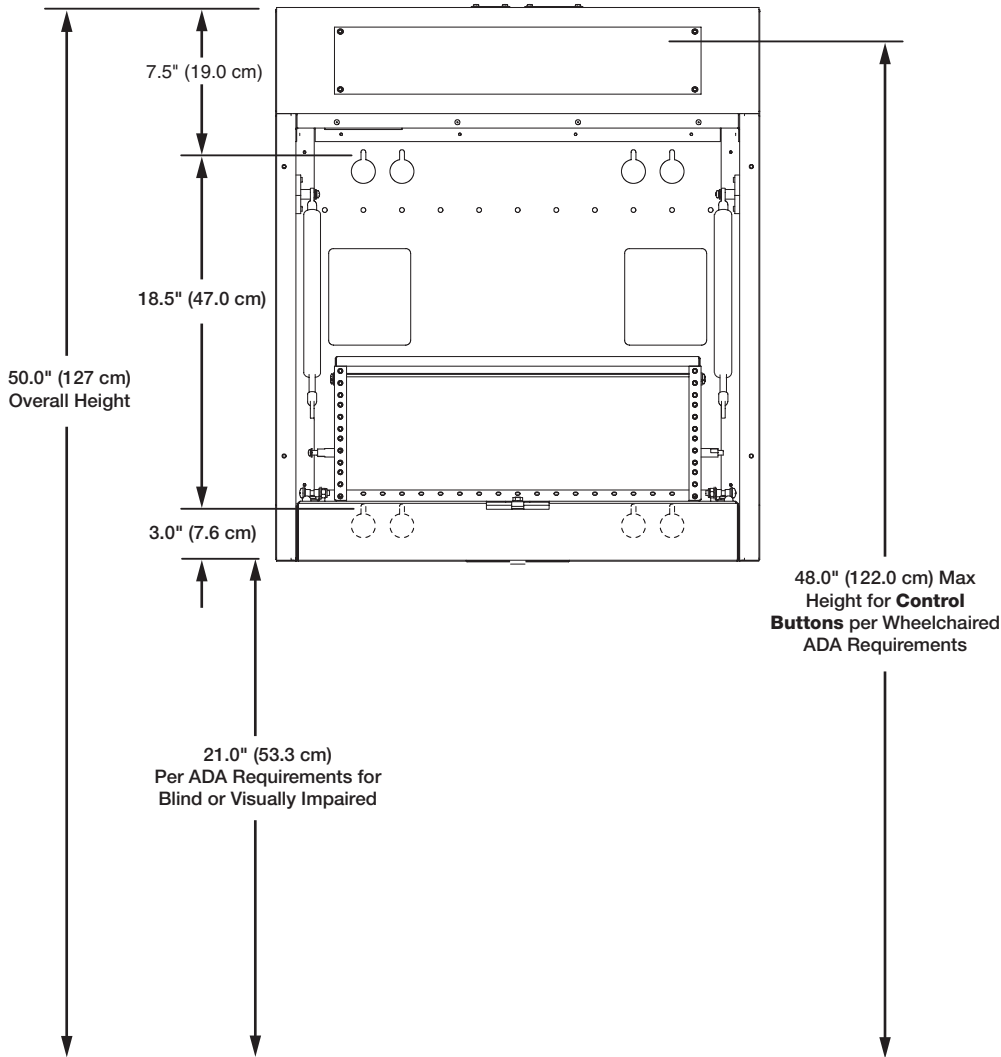


Figure 3. MLM-WB+ Installation Dimensions

## Reference

ADA Standards for Accessible Design (28 CFR, Part 36)

- 4.4.1 Protruding Objects
- 4.2.6 Space Allowable and Reach Ranges

<b>Extron Headquarters</b> +800.633.9876 Inside USA/Canada Only		<b>Extron Europe</b> +800.3987.6673 Inside Europe Only	<b>Extron Asia</b> +800.7339.8766 Inside Asia Only	<b>Extron Japan</b> +81.3.3511.7655 +81.3.3511.7656 FAX	<b>Extron China</b> +4000.EXTRON +4000.398766 Inside China Only +86.21.3760.1568 +86.21.3760.1566 FAX	<b>Extron Middle East</b> +971.4.299.1800 +971.4.299.1880 FAX	<b>Extron Korea</b> +82.2.3444.1571 +82.2.3444.1575 FAX	<b>Extron India</b> 1800.3070.3777 Inside India Only  +91.80.3055.3777 +91.80.3055.3737 FAX
<b>Extron USA - West</b> +1.714.491.1500 +1.714.491.1517 FAX	<b>Extron USA - East</b> +1.919.850.1000 +1.919.850.1001 FAX	+31.33.453.4040 +31.33.453.4050 FAX	+65.6383.4400 +65.6383.4664 FAX					